



Barracuda Web Site Firewall

Powerful, application-layer security protection for Web servers.

The Barracuda Web Site Firewall protects your Web site and Web applications from attackers leveraging protocol or application vulnerabilities to instigate data theft, denial of service or defacement of your Web site. Unlike traditional network firewalls or intrusion detection systems that simply pass HTTP or HTTPS traffic for Web applications, the Barracuda Web Site Firewall proxies this traffic and inspects it for attacks to insulate your Web servers from direct access by hackers.

Comprehensive Web Site Protection

The Barracuda Web Site Firewall provides award-winning protection from all common attacks on Web applications, including SQL injections, cross-site scripting attacks, session tampering and buffer overflows. As a full proxy, the Barracuda Web Site Firewall blocks or cloaks attacks, while preventing sensitive outbound data leakage, such as credit card or Social Security numbers.

In addition, the Barracuda Web Site Firewall mitigates broken access control to applications by preventing cookie tampering and corruption of an application's access control system. Unlike intrusion detection systems that only analyze byte patterns, the Barracuda Web Site Firewall terminates HTTP traffic on behalf of the Web server to decode character sets, remove padded spacing and normalize against common obfuscation techniques. For added security, the Barracuda Web Site Firewall provides full PKI integration for use with client certificates to verify identities of clients accessing the Web applications.




The Barracuda Web Site Firewall protects Web sites and applications from data theft, denial of service or defacement of Web sites.

Advanced Traffic Management and Acceleration

To minimize ongoing administration associated with security, the Barracuda Web Site Firewall automatically receives Energize Updates for the latest policy definitions, security updates and attack definitions. The Barracuda Web Site Firewall also integrates application delivery capabilities, including SSL offloading, SSL acceleration and load balancing. With the Barracuda Web Site Firewall, you not only secure your Web applications but increase both their performance and availability.

Barracuda Web Site Firewall Architecture

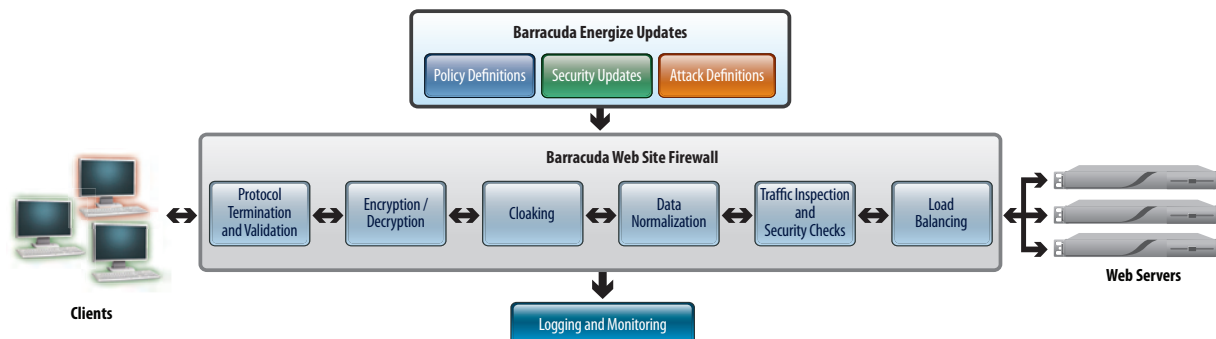

MODEL
360
460
660



BARRACUDA WEB SITE FIREWALL

MODEL
360
460
660

Typical Deployment



TECHNICAL SPECIFICATIONS

Key Features

WEB APPLICATION SECURITY

- HTTP protocol validation
- Protection against common attacks
 - SQL injection
 - OS command injection
 - Cross-site scripting
 - Cookie or forms tampering
- Form field meta data validation
- Web site cloaking
- Response control
 - Block client
 - Reset connection
 - Redirect
- Outbound data theft protection
 - Credit card numbers
 - Social Security numbers
 - Custom pattern matching (regex)
- Granular policies to HTML elements
- Protocol limit checks
- File upload control

LOGGING, MONITORING AND REPORTING

- System log
- Web Firewall log
- Access log
- Audit log
- PCI reports
- Syslog support

APPLICATION DELIVERY AND ACCELERATION

- High availability
- SSL offloading
- Load balancing
- Hardware SSL acceleration

System Features

- Graphical user interface
- Secure remote administration
- Ethernet hard bypass ("fail open")
- Shared policies
- Trusted host exemption

Hardware Features

CONNECTORS

- Ethernet
 - LAN port (1 Gigabit)
 - WAN port (1 Gigabit)
- Serial port (DB-9) for console

POWER REQUIREMENTS

- AC Input Voltage - 110-240 V AC
- Frequency - 50 / 60 Hz

Support Options

ENERGIZE UPDATES SUBSCRIPTION

- Standard technical support
- Policy definitions
- Security updates
- Attack definitions

INSTANT REPLACEMENT SERVICE

- Replacement unit shipped next business day
- 24x7 technical support

| MODEL COMPARISON | MODEL 360 | MODEL 460 | MODEL 660 |
|------------------------------------|-------------------|-------------------|-------------------|
| CAPACITY* | | | |
| Backend Servers Supported | 1-5 | 5-10 | 10-25 |
| Inbound Web Traffic (Mbps) | 25 | 50 | 100 |
| HARDWARE | | | |
| Rackmount Chassis | 1U Mini | 1U Mini | 1U Fullsize |
| Dimensions (in.) | 16.8 x 1.7 x 14 | 16.8 x 1.7 x 14 | 16.8 x 1.7 x 22.6 |
| Dimensions (cm.) | 42.7 x 4.3 x 35.6 | 42.7 x 4.3 x 35.6 | 42.7 x 4.3 x 57.4 |
| Weight (lbs. / kg.) | 12 / 5.4 | 12 / 5.4 | 26 / 11.8 |
| Front Ethernet Ports | 2 x 10/100 | 2 x Gigabit | 2 x Gigabit |
| Back Ethernet Ports | 1 x 10/100 | 1 x 10/100 | 1 x Gigabit |
| AC Input Current (Amps) | 1.2 | 1.4 | 1.8 |
| ECC Memory | | | ✓ |
| FEATURES | | | |
| HTTP Protocol Validation | ✓ | ✓ | ✓ |
| Protection Against Common Attacks | ✓ | ✓ | ✓ |
| Form Field Meta Data Validation | ✓ | ✓ | ✓ |
| Web Site Cloaking | ✓ | ✓ | ✓ |
| Response Control | ✓ | ✓ | ✓ |
| Outbound Data Theft Protection | ✓ | ✓ | ✓ |
| Granular Policies to HTML Elements | ✓ | ✓ | ✓ |
| Protocol Limit Checks | ✓ | ✓ | ✓ |
| File Upload Control | ✓ | ✓ | ✓ |
| Logging, Monitoring and Reporting | ✓ | ✓ | ✓ |
| High Availability | ✓ | ✓ | ✓ |
| SSL Offloading | ✓ | ✓ | ✓ |
| Load Balancing | | ✓ | ✓ |
| Hardware SSL Acceleration | | | ✓ |

US 10.0

Specifications subject to change without notice.

*Capacity depends on environment and selected options.